
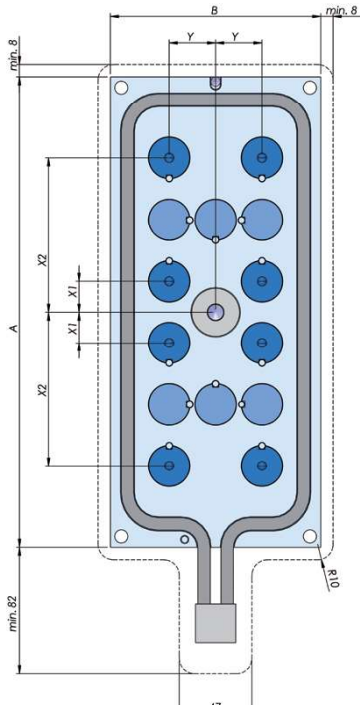



Rozdzielacz DHV

I strefa regulacji temperatury

Typ rozdzielacza	X2 min.	X2 maks.	Y min.	Y maks.	A	B	Moc strefy [W] przy 230 [V]
DHV 32,5/100	87,5	112,5	30	35	305	136	2800

Uwaga! X1 = min. 20 mm

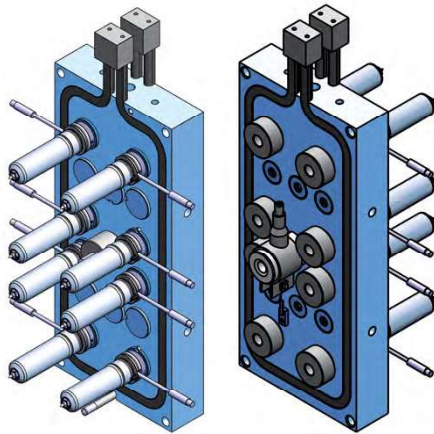

II strefa regulacji temperatury

Typ rozdzielacza	X2 min.	X2 maks.	Y min.	Y maks.	A	B	Z	Moc strefy [W] przy 230 [V]
DHV 50/100	87,5	112,5	45	55	305	176	112	2400
DHV 50/125	112,5	137,5	45	55	355	176	112	2600
DHV 50/150	137,5	162,5	45	55	405	176	112	2800
DHV 50/175	162,5	187,5	45	55	455	176	112	3200
DHV 60/150	137,5	162,5	55	65	405	196	132	2800
DHV 60/175	162,5	187,5	55	65	455	196	132	3200

Uwaga! X1 = min. 20 mm

